


## Model : PH-201

## *ISO-9001, CE, IEC1010*



pH electroode ( optional )

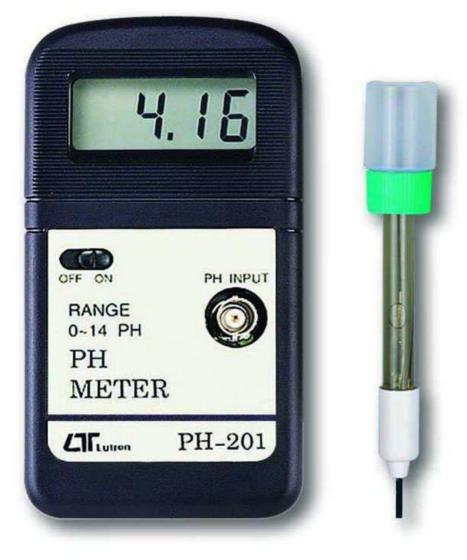





## **PH METER**

## Model: PH-201

	GENERAL SPECIFICATIONS	
Features	* Economical cost digital PH meter	
	* General purpose applications.	
	* Easy operation.	
	* Compact size, light weight.	
Display	LCD, size : 45 mm x 29 mm.	
Measurement	pH.	
Range/Resolution	0 to 14 pH x 0.01 pH.	
Accuracy	± 0.07 pH ( pH 5 - pH 9 ), ± 0.1 pH ( pH 4 - pH 10 )	
	± 0.2 pH ( pH 1 - pH 3.9, pH 10.1 - pH 13 ).	
	* Main instrument only.	
Input Impedance	10^12 ohms.	
PH range Temp.	Not necessary to adjust.	
Compensation		
Sampling Time	Approx. 0.4 second.	
Operating Temperature	$0^\circ\!{\rm C}$ to $50^\circ\!{\rm C}$ ( $32^\circ{\rm F}$ to $122^\circ{\rm F}$ ).	
Operating Humidity	Less than 80% RH.	
Calibration VR	External pH 4 ( slope adj. ) & pH 7 ( Cal. adj. ) calibration adjustment VR.	
Power Supply	006P DC 9V battery.	
Power Consumption	Approx. 2.0 mA.	
Dimension	131 x 70 x 25 mm,(5.3 x 2.4 x 1.3 inch).	
Weight	153 g/0.34 LB (including battery).	
PH electrode	Any connector PH Electrode with	
( Optional )	BNC connector.	
Standard	Instruction Manual 1 PC.	
Accessories		
Optional	pH electrode, pH 4, pH 7 buffer solution,	
Accessories	Carrying case, Case holder.	

	APPLICATIONS	
* AQUARIUMS	* PLATING INDUSTRY	* LABORATORY
* BEVERAGE	* QUALITY CONTROL	* SCHOOLS & COLLEGES
* FISH HATCHERIES	* FOOD PROCESSING	* SWIMMING POOLS
* PAPER INDUSTRY	* PHOTOGRAPHY	* WATER CONDITIONING

OPTIONAL ACCESSORIES			
PH ELECTRODE	General purpose pH electrode with BNC connector.		
PE-03	Range : 1 to 13 pH ( typical 0 to 14 pH ).		
	Epoxy body, Body size : 12 mm dia. x 160 mm. Cable length : 1 meter.		
PH ELECTRODE	General purpose & high quality pH electrode with BNC connector.		
PE-11	Range : 1 to 13 pH ( typical 0 to 14 pH ).		
	Epoxy body, Body size : 9.5 mm dia. x 120 mm. Cable length : 1 meter.		
PH ELECTRODE	High quality, Professional, Laboratory & field usage.		
PE-01	Range : 0 to 14 pH.		
	Epoxy body, Body size : 9.5 mm dia. x 120 mm. Cable length : 0.75 meter.		
SPEAR TIP PH ELECTRODE	Ideal for penetration pH measurements into meats, cheese, soil		
PE-04HD	and other types of measurements requiring sample penetration.		
	Range : 0 to 14 pH.		
SPEAR TIP PH ELECTRODE	Ideal for penetration pH measurements into meats, cheese, soil		
PE-06HD	and other types of measurements requiring sample penetration.		
	Range : 1 to 13 pH.		
BUFFER SOLUTION, PH-07	pH 7.00 standard buffer solution.		
BUFFER SOLUTION, PH-04	pH 4.00 standard buffer solution.		
CARRYING CASE, CA-52A	Vinyl soft case for PH-201.		
CARRYING CASE, CA-06	Hard carrying case for PH-201.		

\* Appearance and specification listed in this brochure are subject to change without notice.