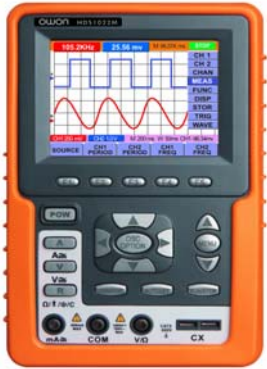


Model Number:	HDS1022M			
Description:	Handheld Digital Storage Oscilloscope & Digital Multimeter			
	Bandwidth	20 MHz		
	Real-time sample rate	100MS/s		
	Rising time	17.5ns		
	Channels	Dual		
	Independently floating isolated inputs	Yes (for multimeter and between oscilloscope and multimeter)		
	Time base range	5ns-5s/div		
	Vertical sensitivity	5mV-5V/div		
	Trigger modes	Free Run, Single shot, Edge, Video		
	Scope measurements	2 Cursor+5 Automatic		
	Record length	6K points per channel		
	Memory for screen and set up	4 Screens、4 set up		
	True RMS multimeter	Volts, Amps, Ohms, Continuity, Diode		
	Voltage Range	400mV、4V、40V、400V		
	Best Accuracy	VDC ± (1%+1); VAC ± (1%+3)		
Resistance	400Ω: ± (1%+3) ; 4K、40K、400K、4M: ± (1%+1) 40M: ± (1.5%+3)			
Capacitance	51.2nF-100uF; ± (3%+3)			
PC interface	RS232 cable and USB cable			
Power supply	6 hrs Li-ion rechargeable battery			
Display Size	3.8 inch color LCD			
Resolution	320 × 240			
Size	180mm×113mm ×40mm			
Weight	690g			
Unit	3 years			
Warranty				
Product and Accessories:	